



HOW TO INSTALL STABILIZERS

Parts Used: 2 Stabilizers, 4 Screws.

1. Lay ROBOT on its back.
2. Engage HOOKS of one STABILIZER into SLOTS on bottom of ROBOT and swing STABILIZER up into position as shown.

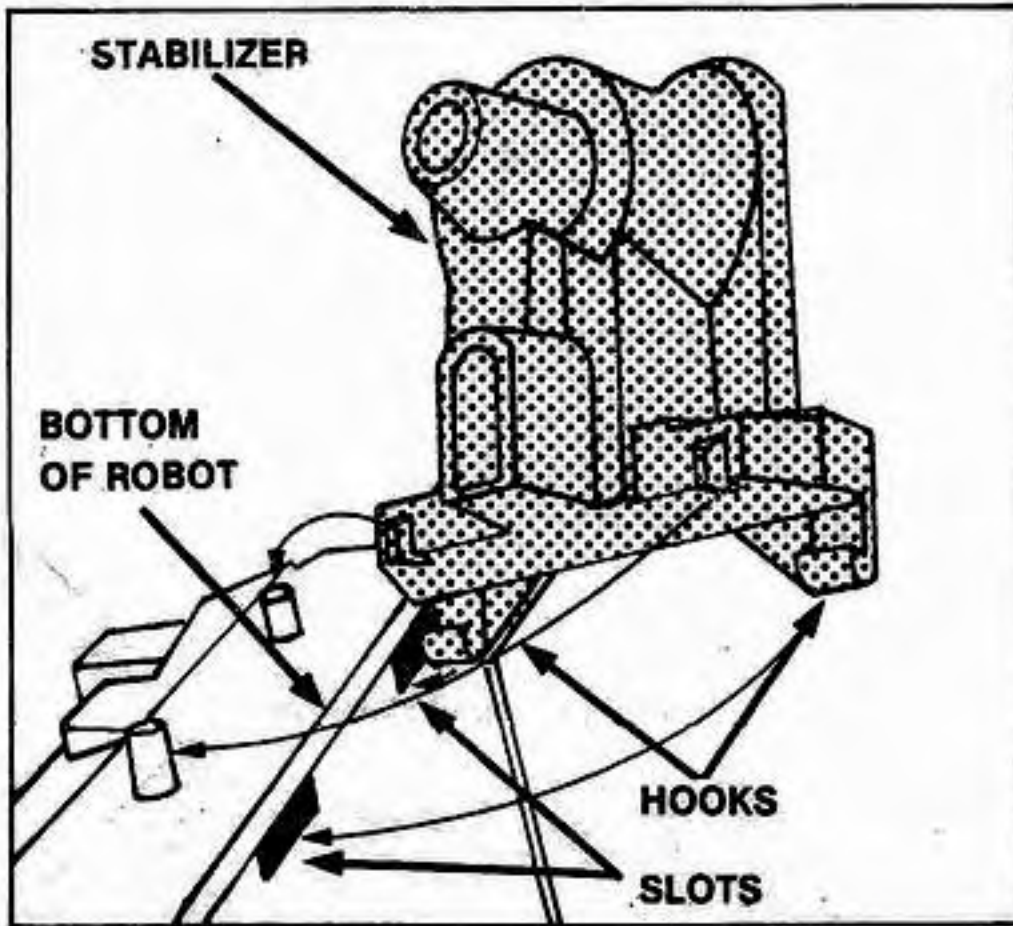

3. Secure STABILIZER to ROBOT using 2 SCREWS. Do not overtighten screws.

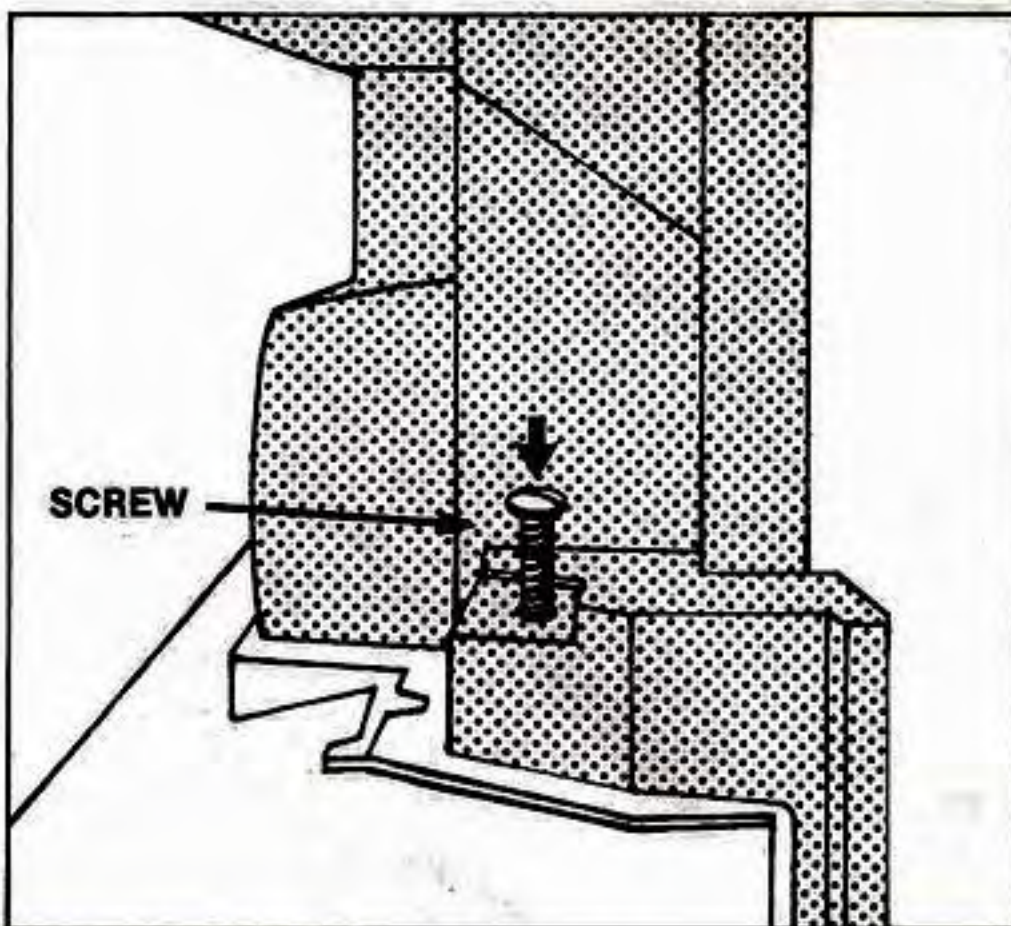

4. Repeat procedure to install second STABILIZER on bottom rear of ROBOT.